


Cetop 3 Subplate with Relief Valve & Bottom Entry P&T Ports

Page Number
83.02.02

FEATURES:

- Aluminium alloy grade 2011 T6, Hard Anodised
- Maximum working pressure 350 Bar cast iron
- **CHANGE** Max flow 60 Ltrs min.

MODEL	OP117
BODY NO	2222333

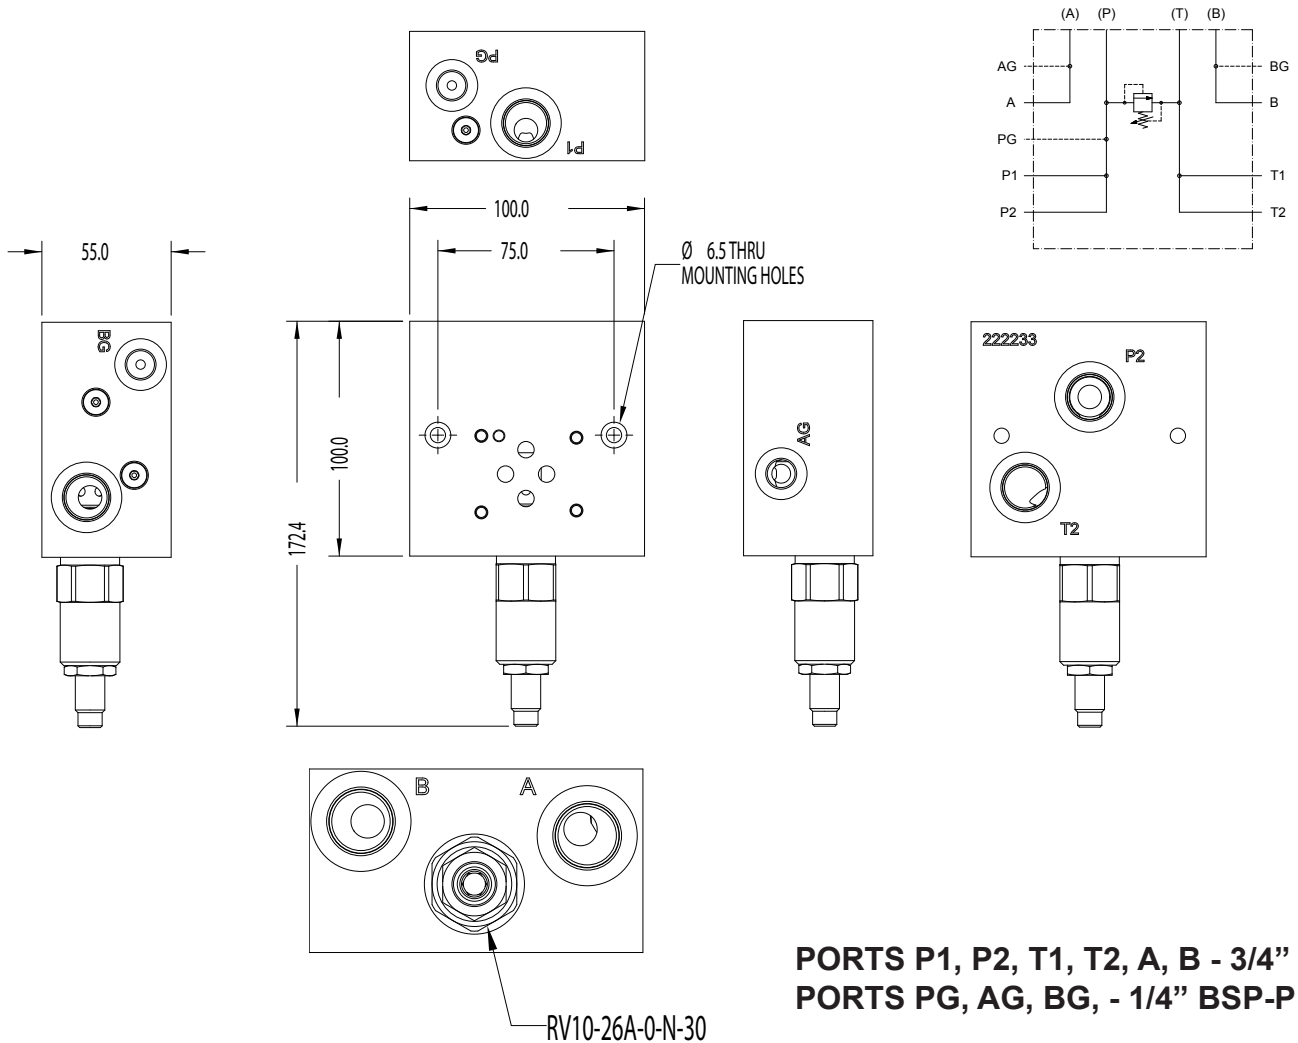

PORTS P1, P2, T1, T2, A, B - 3/4" UNF
PORTS PG, AG, BG, - 1/4" BSP-P

SPECIFICATIONS

VALVE	MODEL	DESCRIPTION	CAVITY
Relief	RV10 - 26A - 0 - N - 30	Pilot operated relief 28 - 210 bar	VC10-2
Relief	RV50 - 26A - 0 - N - 50	Pilot operated relief 83 - 350 bar	VC10 -2

Consult Oilpath
 Hydraulics for
 selection of alternate
 model cartridge
 valves

ORDERING CODE

OP117 - A - 30

Cetop 3 Subplate ↑ A = alloy 210 bar ↑ 30=RV10-26A Relief
 C = cast iron, 350 bar ↑ 50=RV50-26A Relief