


Quick Hitch Valve - Pilot operated check valve - Dual Function

Page Number
80.10.03

FEATURES:

- Locks closed with loss of hydraulic flow and pressure
- Economically priced and ultra compact design
- Dirt tolerant direct acting valves
- Ductile cast iron body with dual function via port C
- Deutsch coil connections
- ER coils rated to IP69K
- Orifice allows connection to high flow circuits

MODEL	OP142
BODY NO	229795

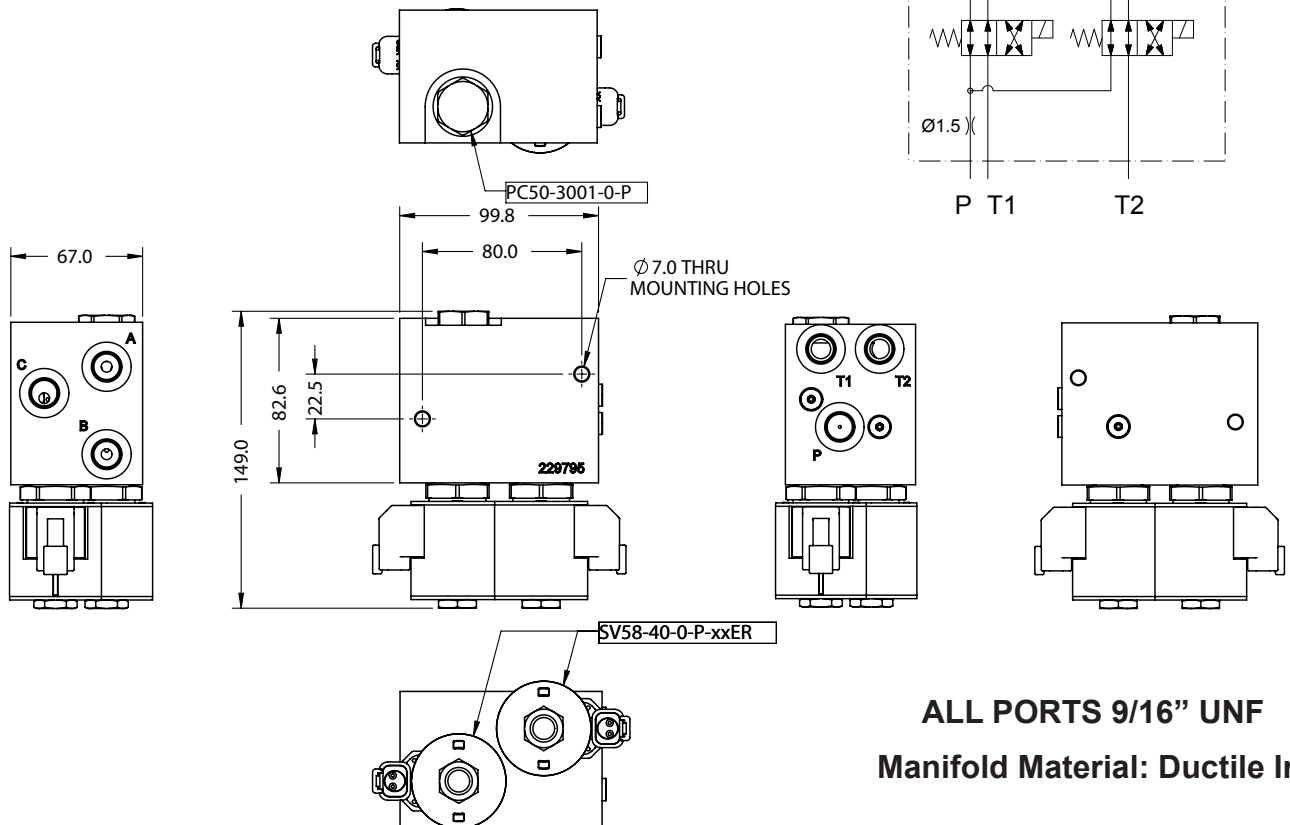

SPECIFICATIONS

OP142	DESCRIPTION
INLET PRESSURE	350 bar max.
DIRECTIONAL VALVE	SV58-40-0-P-XXER
PILOT OPERATED CHECK VALVE	PC50-3001-0-P
COIL TYPE 12 VOLTS	430612, ER-IP69K
COIL TYPE 24 VOLTS	430624, ER-IP69K
Coils have deutsch DT04-2P connector	Part number for coil type is for spare parts

ORDERING CODE

OP142 - 12DCER

Quick Hitch Valve with pilot operated check valve and second function valve
 ↳ 12 or 24 volts ER coil

Consult Oilpath Hydraulics for selection of alternate model cartridge valves