OILPATH HYDRAULICS PTY LTD

innovative manifold and valving solutions

VALVE PACKAGES

Cetop 5 Subplate with Relief and Bottom and Side P&T Ports

MODEL	OP243
BODY NO	02430700

FEATURES:

- Aluminium alloy grade 6061T6, Hard Anodised
- Maximum working pressure 210 Bar alloy
- Max flow 100 Ltrs min.
- Pilot operated reliefs give minimal pressure varation with flow
- Top and bottom P&T ports for ease of installation

Available in cast iron with RV50-26 relief valve for 350 bar operation

PERFORMANCE (Cartridge Only)



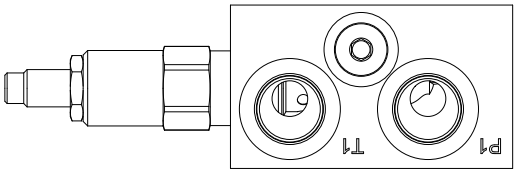

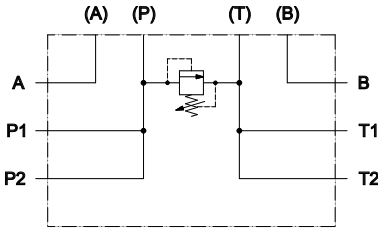

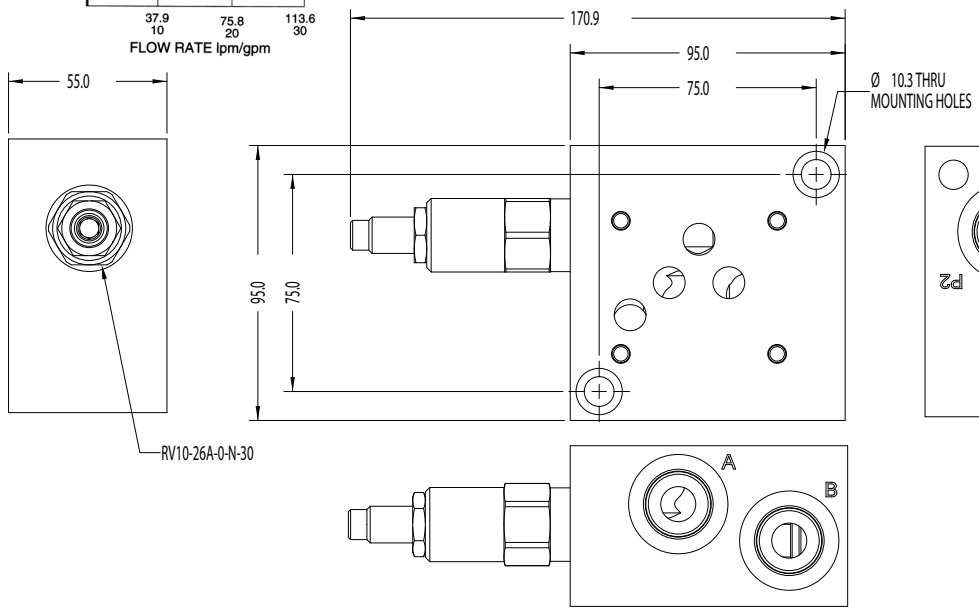

ALL PORTS 7/8' UNF

SPECIFICATIONS

VALVE	MODEL	DESCRIPTION	CAVITY
Relief Valve	RV10-26A-0-N-30	Pilot operated relief valve, 28 - 210 bar	VC10-2
Relief Valve	RV50-26A-0-N-50	Pilot operated relief valve	VC10-2

Consult Oilpath Hydraulics for selection of alternate model cartridge valves

ORDERING CODE

OP243 - A - 30

- OP243: Cetop 5 Subplate with Relief
- A = alloy 210 bar; C = cast iron, 350 bar
- 30=RV1026A-0-N-30; 50=RV5026A-0-N-50

OILPATH HYDRAULICS Pty Ltd
Telephone (08) 8277 4933
Fax (08) 8277 9126

A.C.N. 007 683 472 A.B.N. 97 007 683 472
Web: http://oilpathhydraulics.com.au
Email: sales@oilpathhydraulics.com.au

OILPATH HYDRAULICS Pty Ltd reserve the right to change specifications in this document without notice.Refer to the Oilpath Hydraulics full catalogue for warranty and terms and conditions of sale. Nov10