


Compensator and Relief Block

Page Number
82.04.10

FEATURES:

- Aluminium alloy grade 2011T6, Hand Anodised
- Maximum working pressure 210 Bar
- Max flow 100 Ltrs min.
- Ball type check valves with good contamination tolerance
- Pilot operated reliefs give minimal pressure variation with flow change

MODEL	OP750
BODY NO	687784

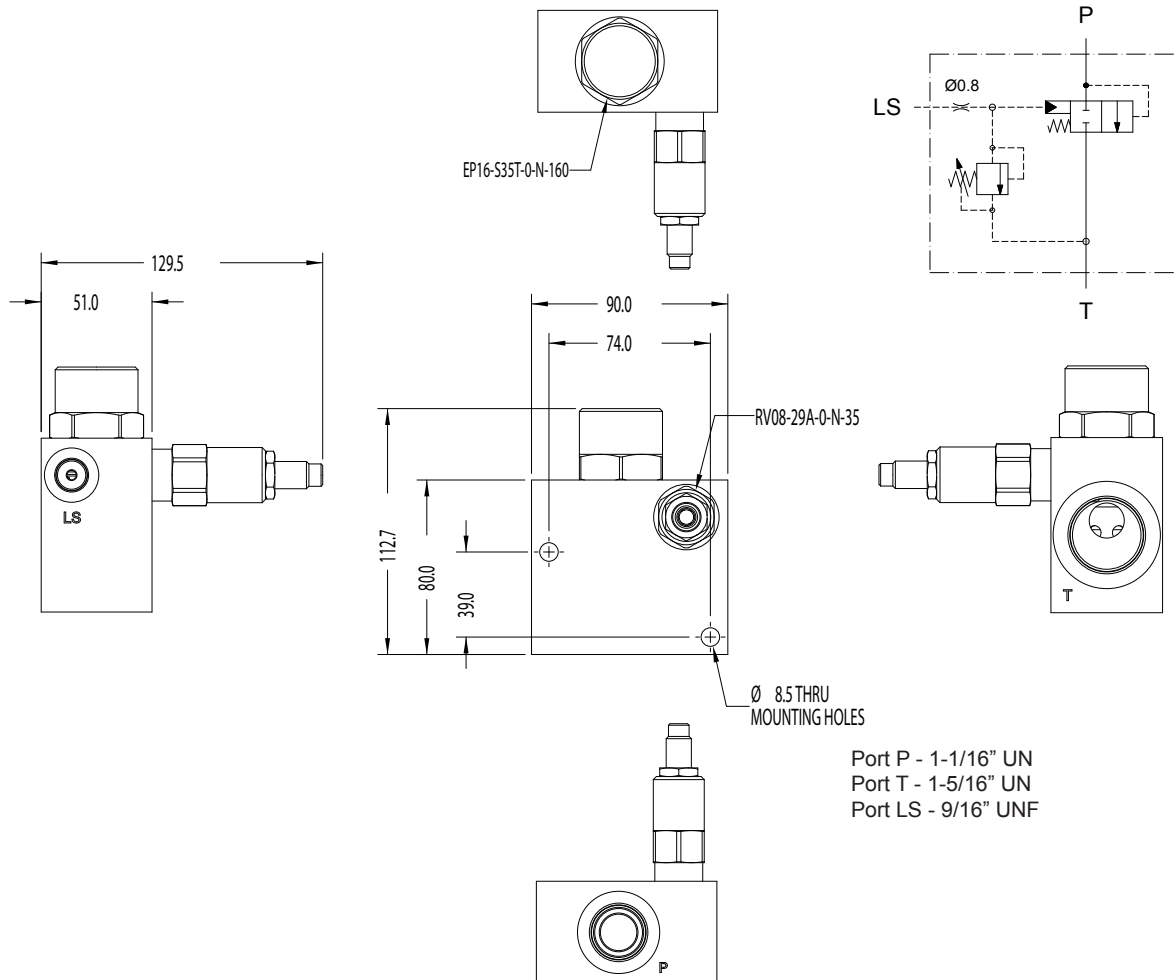

SPECIFICATIONS

VALVE	MODEL	DESCRIPTION	CAVITY
Relief	RV08-29A-0-N-35	Direct-Acting Poppet type, 1.89 l/min	VC08-2
Compensator	EP16-S35T-0-N-160	Piloted logic element 180 l/min.	VC16-S3

Consult Oilpath Hydraulics for selection of alternate model cartridge valves

ORDERING CODE

OP750 - S

Compensator and Relief Block ↑ Optional, Omit for alloy S = steel, refer to factory