


Nipple

Straight hose connection

Series 710: Nipple for SAE 100R1/R2 hose or equivalent

Working Pressure

- 1/4" 350 bar (5076 PSI)
- 3/8" 350 bar (5076 PSI)
- 1/2" 350 bar (5076 PSI)
- 3/4" 350 bar (5076 PSI)
- 1" 250 bar (3625 PSI)

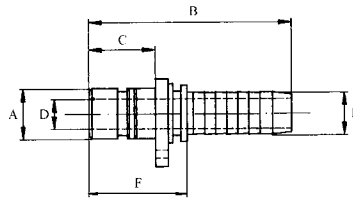

	Part No.	Connection (E)	A	B	C	D	F	
NIPPLE – straight	Series 710, 1/4"	14 710 0403	3/16" (5.25)	10.0	54.5	19.0	2.8	29.2
		14 710 0404	1/4" (6.9)	10.0	58.0	19.0	4.5	30.0
	Series 710, 3/8"	14 710 0604	1/4" (6.9)	13.0	61.0	22.0	4.5	33.0
		14 710 0605	5/16" (8.6)	13.0	61.0	22.0	5.6	33.0
		14 710 0606	3/8" (10.1)	13.0	63.0	22.0	7.0	33.0
	Series 710, 1/2"	14 710 0806	3/8" (10.1)	16.0	63.0	22.0	7.0	33.0
		14 710 0808	1/2" (13.6)	16.0	64.0	22.0	9.5	33.0
	Series 710, 3/4"	14 710 1208	1/2" (13.6)	23.0	73.5	31.0	9.5	42.5
		14 710 1210	5/8" (16.8)	23.0	77.5	31.0	13.0	43.3
		14 710 1212	3/4" (20)	23.0	82.0	31.0	15.0	43.0
Series 710, 1"	14 710 1616	1" (26.2)	30.0	100.5	38.5	21.0	54.0	



Nipple

45° Hose connection

Series 712: Nipple for SAE 100R1/R2 hose or equivalent

Working Pressure

- 1/4" 350 bar (5076 PSI)
- 3/8" 350 bar (5076 PSI)
- 1/2" 350 bar (5076 PSI)
- 3/4" 350 bar (5076 PSI)

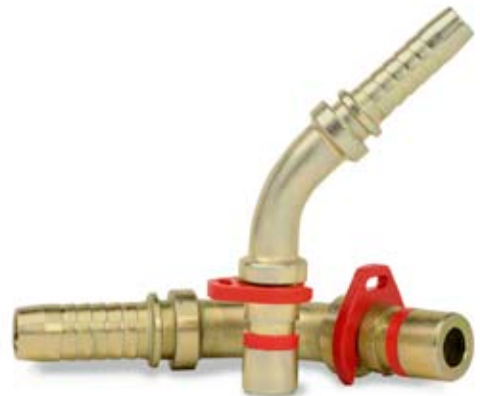

	Part No.	Connection (E)	A	B	C	D	
NIPPLE – 45°	Series 712, 1/4"	14 712 0404	1/4" (6.9)	10.0	28.0	51.0	4.5
	Series 712, 3/8"	14 712 0606	3/8" (10.1)	13.0	33.0	59.0	7.0
	Series 712, 1/2"	14 712 0808	1/2" (13.6)	16.0	36.0	66.0	9.0